

Flat suction cup (round)

PFG 50 NBR-55 N008

Osanro.:10.01.01.00017

<https://www.schmalz.com/10.01.01.00017>

Aloitussivu > Alipainetekniikkaa automaatioon > Alipaineekomponentit > Imukupit > Litteä imukuppi (pyöreä) > PFG 50 NBR-55 N008

Flat suction cup (round) for smooth or slightly rough surfaces




Size: 50

Suction cup material: Nitrile rubber NBR

Material hardness [Shore A]: 55 Shore A

Suunnitteludata

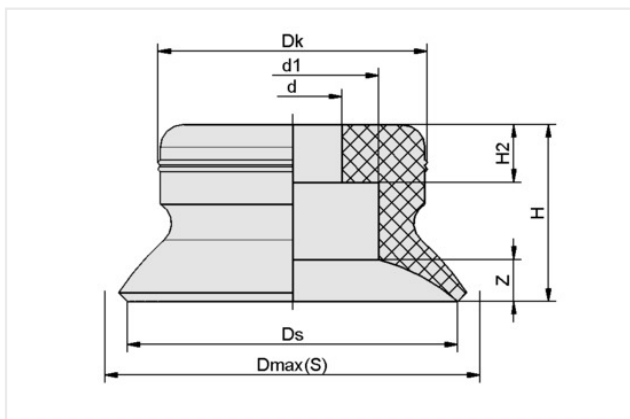

Attribuutti

Arvo

d	8 mm
d1	20 mm
Dk	29,10 mm
Dmax(S)	53,50 mm
Ds	50 mm
H	15 mm
H2	7 mm
Z (Stroke)	4 mm

Note: Acceptable dimensional tolerances for elastomer parts concerning to DIN ISO 3302-1 M3

Tekniset tiedot

Attribuutti	Arvo
Suction force (-600mbar)	91 N
Volume	7,08 cm ³
Curve radius (min) (convex)	75 mm
Size	50
Nipple family	N 008
Suction cup material	Nitrile rubber NBR
Material hardness [Shore A]	55 Shore A
Weight	10,20 g

Ota yhteyttä Schmalziin

Oy Schmalz Ab | Taivaltie 5, 01610 Vantaa, Finland | +358 10 2312011 | schmalz@schmalz.fi

Flat suction cup (round)

PFG 50 NBR-55 N008

Osanro.:10.01.01.00017

<https://www.schmalz.com/10.01.01.00017>

Product family

PFG

Note: Suction force: The specified suction forces are theoretical values at a vacuum of -0.6 bar and with a dry, smooth and flat workpiece surface - they do not include a safety factor
Hose diameter: The recommended hose diameter refers to a hose length of approx. 2 m

Lisätarvikkeet



SA-NIP N008 G1/8-AG DN350

Osanro.:10.01.01.03532

Thread G1: G1/8"-M

Length L1: 22 mm

Fitting length: 5 mm

Material: Aluminum

Spanner size SW2: 4 mm



SA-NIP N008 G1/8-IG DN350

Osanro.:10.01.01.03524

Thread G1: G1/8"-F

Length L1: 25 mm

Fitting length: 16 mm

Material: Aluminum

Spanner size SW2: 4 mm



SU 50

Osanro.:10.01.01.12837

Size: 50

Clamping range: 45.0 ... 60.0 mm

Temperature resistance: 80 °C

Flat suction cup (round)

PFG 50 NBR-55 N008

Osanro.:10.01.01.00017

<https://www.schmalz.com/10.01.01.00017>
